

HPP8-工程塑料轴承 Plastic Plain Bearings


轴承PV值 PV Value

HPP8塑料轴承最大运行PV值为 $0.8\text{N/mm}^2 \times \text{m/s}$;由此决定轴承所承受的载荷与速度成反比,详情查阅图表HPP8-1。

The max PV value of the HPP8 plastic bearing is $0.8\text{N/mm}^2 \times \text{m/s}$ which determines the load capacity of bearing is inversely proportional to the speed. Please refer to the chart for more detailed information (Graph HPP8-1).

图表 HPP8-1: PV 图表

Graph HPP8-1: Permissible PV value for HPP8

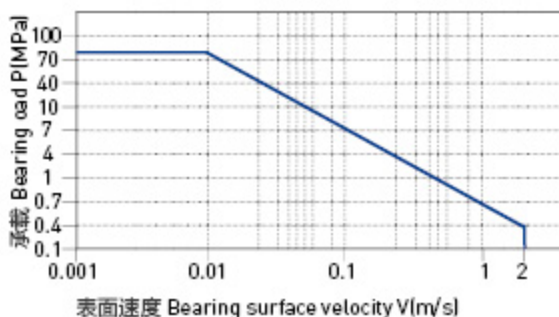


轴承的载荷、速度、温度 Load, Speed And Temperature

HPP8系列轴承可承受最大静载荷为80Mpa,在此载荷下轴承的最大压缩变形量参考图表HPP8-2,轴承实际工作载荷略小于80Mpa,载荷还受到运行速度以及温度的影响,速度越快(Vmax: 2.0m/s)会导致摩擦温度上升,而温度上升(Tmax: 200℃)会导致轴承的承载能力逐渐减弱,载荷随轴承工作温度变化情况参考图表HPP8-3。

HPP8 allows the Max static load of 80Mpa, The max compressive deformation rate under the max load is listed in Graph HPP8-2, The actual load capacity of bearing is slightly less than 80Mpa, The bearing load is variable against the speed and temperature, Fast speed (Vmax: 2.0m/s) results into higher temperature (Tmax: 200℃) which decreases the load capacity of the bearing. Please refer to the Graph HPP8-3 for such variation.


图表 HPP8-2: 载荷 - 温度 - 变形量图表

Graph HPP8-2: Load-Temperature deformation

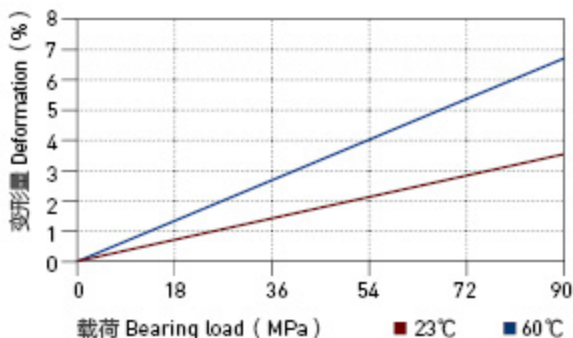

图表 HPP8-3: 载荷 - 温度图表

Graph HPP8-3: Load-Temperature diagrams

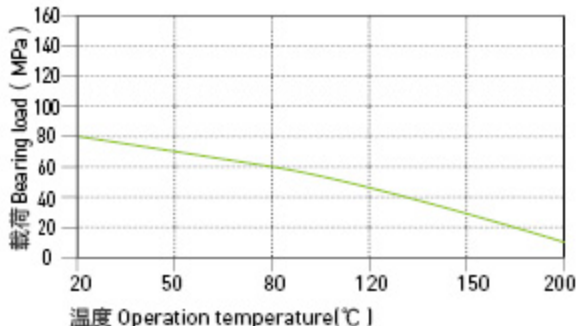

HPP8-工程塑料轴承 Plastic Plain Bearings

轴承的摩擦系数、磨损、轴材料 Friction Factor, Wear And Shaft Material

■ 轴承的摩擦系数 Friction factor

图表HPP8-4表明HPP8轴承在载荷保持不变时旋转下的摩擦系数会随着速度的增加而略有减低；图表HPP8-5表明HPP8轴承在速度保持不变时旋转下的摩擦系数会随着载荷的增加而逐步降低，特别是在载荷小于30Mpa的情况下。图表HPP8-6表明HPP8轴承的对磨轴粗糙度在Ra0.3- 0.4um时摩擦系数几乎没有变化，但当轴表面粗糙度大于Ra0.4时摩擦系数会快速上升；我们推荐使用轴的粗糙度为Ra0.3-0.4um。

Friction factor will be slightly decreased along with the speed increasing under certain loading of the rotation operation (see Graph HPP8-4) and it will be slightly decreased along with the loading increasing under certain speed of the rotation operation especially when the loading is less than 30Mpa. Graph HPP8-5 tells that the friction of the HPP8 is not changed at all when the shaft roughness is between Ra0.3 to Ra0.4 and will be considerably increased when the shaft roughness is over Ra0.4. So the recommended shaft roughness is Ra0.3-Ra0.4.

HPP8	干运行 Dry	油脂 Grease	油 Oil	水 Water
摩擦系数 μ Friction coef.	0.07~0.20	0.09	0.04	0.04


■ 磨损与轴材料 Wearing and shaft material

图表HPP8-7表明HPP8轴承在低载荷旋转运动时适合大多数轴材料，而在高载旋转下硬化钢轴表现尤为特出（见图表HPP8-7）；图表HPP8-8显示HPP8轴承在采用不锈钢轴摆动运动下较为合适，而在旋转运动中碳钢轴和硬化钢轴效果比较好。

Graph HPP8-7 shows that HPP8 is suitable for most of the shaft materials under low loading rotation operation and it is good for hardened carbon steel shaft under high loading rotation operation (see Graph HPP8-7). From Graph HPP8-8, we can also read that HPP8 is suitable for stainless steel shaft under oscillation operation and good for hot rolled carbon steel and hardened carbon steel shaft under rotation operation.


图表 HPP8-4: 摩擦系数与速度变化关系图表 P=2MPa

Graph HPP8-4: Coefficient of friction & the speed of bearing, P=2Mpa

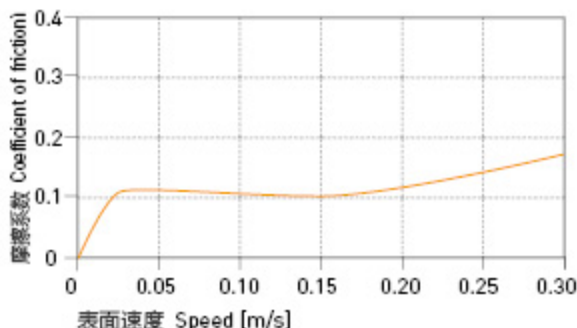


图表 HPP8-5: 摩擦系数与载荷变化关系图表 v=0.2m/s

Graph HPP8-5: Coefficient of friction & the pressure of bearing, v=0.2m/s

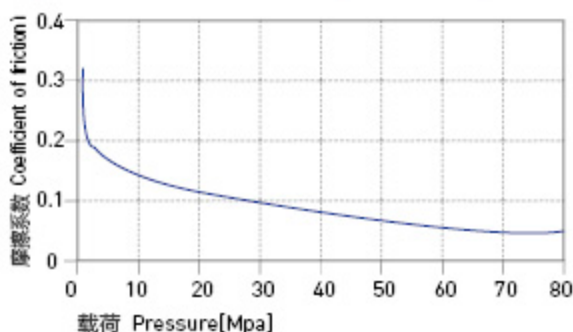

图表 HPP8-6: 摩擦系数与轴表面粗糙度关系图表

Graph HPP8-6: Coefficient of friction & the surface roughness of shaft

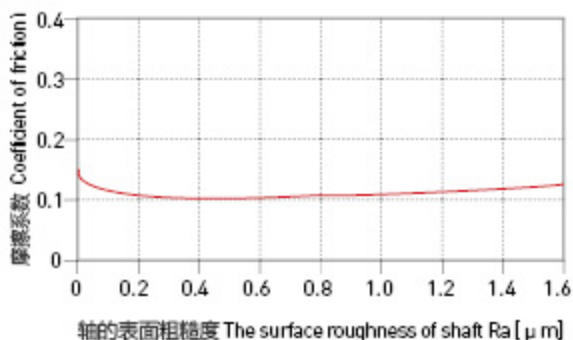

HPP8-工程塑料轴承 Plastic Plain Bearings

轴承的摩擦系数、磨损、轴材料 Friction Factor, Wear And Shaft Material

■ 化学抗性 Chemical Resistance

HPP8塑料轴承具有很好的化学抗性，能抵抗绝大多数酸碱。

The Chemical Resistance of HPP8 is fairly good against most of Acid and Alkalis.

■ 吸水性 Water Absorbability

在标准大气压中，HPP8塑料轴承的吸水率极低0.1%，浸泡水中最大平衡吸水率为0.3%；因此材料不会吸水而发生性能变化和尺寸变化，适用于潮湿环境甚至水下。

The water absorb rate of HPP8 is 0.1% under the atmospheric pressure while it is 0.3% when the material is immersed into water. The material performance and dimensions of the material is stabilized for the applications under humid environment.

■ 抗UV性能 UV Resistance

HPP8长久暴露在紫外线下材料表面会发生蜕变，抗压强度会下降。


Disintegration could be possible for the material HPP8 after long period of exposing under the UV ray and therefore the compressive strength will be reduced.

■ 安装公差 Installation Tolerances


HPP8塑料轴承压装后公差Tolerances after pressfit

直径 DI. [mm ²]	HPP8 E10 [mm]	座孔 Housing H7 [mm]	轴 Shaft h9 [mm]
> 0-3	+0.014~+0.054	0~+0.010	0~-0.025
> 3-6	+0.020~+0.068	0~+0.012	0~-0.030
> 6-10	+0.025~+0.083	0~+0.015	0~-0.036
> 10-18	+0.032~+0.102	0~+0.018	0~-0.043
> 18-30	+0.040~+0.124	0~+0.021	0~-0.052
> 30-50	+0.050~+0.150	0~+0.025	0~-0.062
> 50-80	+0.060~+0.180	0~+0.030	0~-0.074
> 80-120	+0.072~+0.212	0~+0.035	0~-0.087
> 120-180	+0.085~+0.245	0~+0.040	0~-0.100


图表 HPP8-7: 在不同轴材料上旋转时的磨损量 $P=2\text{MPa}$, $v=0.2\text{m/s}$
Graph HPP8-7: The bearing wear under rotating with different shaft materials, $p=2\text{MPa}$, $v=0.2\text{m/s}$

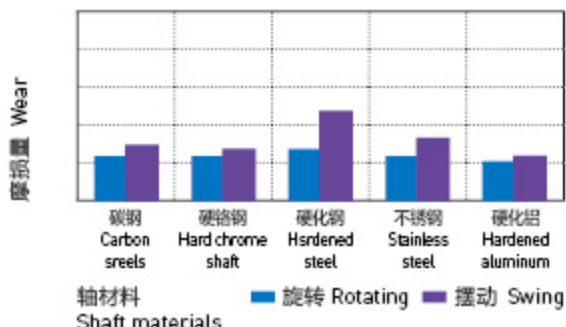


图表 HPP8-8: 旋转磨损随轴材料与压力变化关系 $v=0.2\text{m/s}$
Graph HPP8-8: The bearing wear & pressure under rotating with different shaft materials, $v=0.2\text{m/s}$

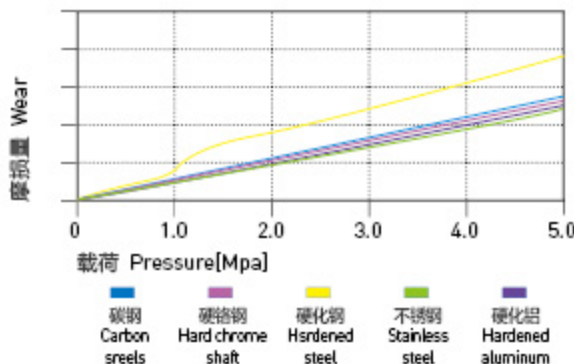

图表 HPP8-9: 吸水性的影响
Graph HPP8-9: Effect of moisture absorption on HPP8 bearings

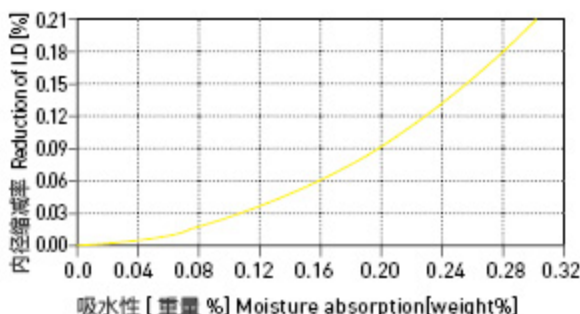

HPP8标准规格Standard 直套Metric Cylindrical Bushings

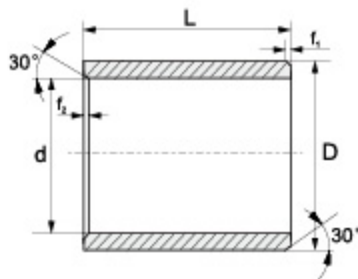

推荐安装公差 Recommend fitting tolerance:
座孔 Housing: H7
轴 Shaft: h9

订购编码 Order P/N:

HPP8-0203-03

材料 Material

d	f ₁	f ₂
1-6	0.3	0.5
6-12	0.5	
12-30	0.8	
>30	1.2	

订购编码 Order P/N	d [mm]	d- 公差 After fitting [mm]	D [mm]	L(h13) [mm]
HPP8-0203-03	2	+0.014/+0.054	3.5	3
HPP8-0304-03	3	+0.014/+0.054	4.5	3
HPP8-0304-05	3	+0.014/+0.054	4.5	5
HPP8-0304-06	3	+0.014/+0.054	4.5	6
HPP8-0405-04	4	+0.02/+0.068	5.5	4
HPP8-0405-06	4	+0.02/+0.068	5.5	6
HPP8-0506-05S	5	+0.01/+0.04	6	5
HPP8-0507-05	5	+0.02/+0.068	7	5
HPP8-0507-08	5	+0.02/+0.068	7	8
HPP8-0507-10	5	+0.02/+0.068	7	10
HPP8-0608-04	6	+0.02/+0.068	8	4
HPP8-0608-05	6	+0.02/+0.068	8	5
HPP8-0608-06	6	+0.02/+0.068	8	6
HPP8-0608-08	6	+0.02/+0.068	8	8
HPP8-0608-09	6	+0.02/+0.068	8	9
HPP8-0608-10	6	+0.02/+0.068	8	10
HPP8-0608-11	6	+0.02/+0.068	8	11
HPP8-0810-05	8	+0.025/+0.083	10	5
HPP8-0810-06	8	+0.025/+0.083	10	6
HPP8-0810-07	8	+0.025/+0.083	10	7
HPP8-0810-08	8	+0.025/+0.083	10	8
HPP8-0810-10	8	+0.025/+0.083	10	10
HPP8-0810-12	8	+0.025/+0.083	10	12
HPP8-0810-13	8	+0.025/+0.083	10	13
HPP8-0810-15	8	+0.025/+0.083	10	15
HPP8-0810-21	8	+0.025/+0.083	10	21
HPP8-1011-06	10	+0.025/+0.083	11	6
HPP8-1012-04	10	+0.025/+0.083	12	4
HPP8-1012-05	10	+0.025/+0.083	12	5
HPP8-1012-06	10	+0.025/+0.083	12	6
HPP8-1012-07	10	+0.025/+0.083	12	7
HPP8-1012-08	10	+0.025/+0.083	12	8
HPP8-1012-09	10	+0.025/+0.083	12	9
HPP8-1012-10	10	+0.025/+0.083	12	10
HPP8-1012-12	10	+0.025/+0.083	12	12
HPP8-1012-14	10	+0.025/+0.083	12	14

订购编码 Order P/N	d [mm]	d- 公差 After fitting [mm]	D [mm]	L(h13) [mm]
HPP8-1012-15	10	+0.025/+0.083	12	15
HPP8-1012-17	10	+0.025/+0.083	12	17
HPP8-1012-20	10	+0.025/+0.083	12	20
HPP8-1213-12S	12	+0.016/+0.059	13	12
HPP8-1214-04	12	+0.032/+0.102	14	4
HPP8-1214-06	12	+0.032/+0.102	14	6
HPP8-1214-08	12	+0.032/+0.102	14	8
HPP8-1214-10	12	+0.032/+0.102	14	10
HPP8-1214-12	12	+0.032/+0.102	14	12
HPP8-1214-14	12	+0.032/+0.102	14	14
HPP8-1214-15	12	+0.032/+0.102	14	15
HPP8-1214-20	12	+0.032/+0.102	14	20
HPP8-1214-25	12	+0.032/+0.102	14	25
HPP8-1315-15	13	+0.032/+0.102	15	15
HPP8-1315-25	13	+0.032/+0.102	15	25
HPP8-1416-03	14	+0.032/+0.102	16	3
HPP8-1416-08	14	+0.032/+0.102	16	8
HPP8-1416-10	14	+0.032/+0.102	16	10
HPP8-1416-15	14	+0.032/+0.102	16	15
HPP8-1416-20	14	+0.032/+0.102	16	20
HPP8-1416-25	14	+0.032/+0.102	16	25
HPP8-1517-10	15	+0.032/+0.102	17	10
HPP8-1517-12	15	+0.032/+0.102	17	12
HPP8-1517-15	15	+0.032/+0.102	17	15
HPP8-1517-20	15	+0.032/+0.102	17	20
HPP8-1517-25	15	+0.032/+0.102	17	25
HPP8-1618-10	16	+0.032/+0.102	18	10
HPP8-1618-12	16	+0.032/+0.102	18	12
HPP8-1618-15	16	+0.032/+0.102	18	is
HPP8-1618-20	16	+0.032/+0.102	18	20
HPP8-1618-25	16	+0.032/+0.102	18	25
HPP8-1618-30	16	+0.032/+0.102	18	30
HPP8-1820-10	18	+0.032/+0.102	20	10
HPP8-1820-12	18	+0.032/+0.102	20	12
HPP8-1820-15	18	+0.032/+0.102	20	15
HPP8-1820-20	18	+0.0321/+0.102	20	20


订购编码 Order PN	d [mm]	d- 公差 After fitting [mm]	D [mm]	L(h13) [mm]
HPP8-1820-25	18	+0.032/+0.102	20	25
HPP8-2022-20	20	+0.04/+0.124	22	20
HPP8-2022-30	20	+0.04/+0.124	22	30
HPP8-2023-10	20	+0.04/+0.124	23	10
HPP8-2023-15	20	+0.04/+0.124	23	15
HPP8-2023-20	20	+0.04/+0.124	23	20
HPP8-2023-25	20	+0.04/+0.124	23	25
HPP8-2023-30	20	+0.04/+0.124	23	30
HPP8-2225-15	22	+0.04/+0.124	25	15
HPP8-2225-20	22	+0.04/+0.124	25	20
HPP8-2225-25	22	+0.04/+0.124	25	25
HPP8-2225-30	22	+0.04/+0.124	25	30
HPP8-2528-12	25	+0.04/+0.124	28	12
HPP8-2528-15	25	+0.04/+0.124	28	15
HPP8-2528-20	25	+0.04/+0.124	28	20
HPP8-2528-24	25	+0.04/+0.124	28	24
HPP8-2528-25	25	+0.04/+0.124	28	25
HPP8-2528-30	25	+0.04/+0.124	28	30
HPP8-2528-35	25	+0.04/+0.124	28	35
HPP8-2832-30	28	+0.04/+0.124	32	30
HPP8-3034-15	30	+0.04/+0.124	34	15
HPP8-3034-20	30	+0.04/+0.124	34	20
HPP8-3034-24	30	+0.04/+0.124	34	24
HPP8-3034-25	30	+0.04/+0.124	34	25
HPP8-3034-30	30	+0.04/+0.124	34	30
HPP8-3034-35	30	+0.04/+0.124	34	35
HPP8-3034-40	30	+0.04/+0.124	34	40
HPP8-3236-30	32	+0.05/+0.15	36	30
HPP8-3236-40	32	+0.05/+0.15	36	40
HPP8-3539-14	35	+0.05/+0.15	39	14
HPP8-3539-20	35	+0.05/+0.15	39	20
HPP8-3539-25	35	+0.05/+0.15	39	25
HPP8-3539-30	35	+0.05/+0.15	39	30

订购编码 Order PN	d [mm]	d- 公差 After fitting [mm]	D [mm]	L(h13) [mm]
HPP8-3539-40	35	+0.05/+0.15	39	40
HPP8-3539-50	35	+0.05/+0.15	39	50
HPP8-3640-20	36	+0.05/+0.15	40	20
HPP8-4044-10	40	+0.05/+0.15	44	10
HPP8-4044-16	40	+0.05/+0.15	44	16
HPP8-4044-20	40	+0.05/+0.15	44	20
HPP8-4044-30	40	+0.05/+0.15	44	30
HPP8-4044-40	40	+0.05/+0.15	44	40
HPP8-4044-50	40	+0.05/+0.15	44	50
HPP8-4246-40	42	+0.05/+0.15	46	40
HPP8-4246-50	42	+0.05/+0.15	46	50
HPP8-4550-40	45	+0.05/+0.15	50	40
HPP8-4550-50	45	+0.05/+0.15	50	50
HPP8-5055-20	50	+0.05/+0.15	55	20
HPP8-5055-30	50	+0.05/+0.15	55	30
HPP8-5055-40	50	+0.05/+0.15	55	40
HPP8-5055-50	50	+0.05/+0.15	55	50
HPP8-5560-20	55	+0.06/+0.18	60	20
HPP8-5560-26	55	+0.06/+0.18	60	26
HPP8-5560-40	55	+0.06/+0.18	60	40
HPP8-5560-50	55	+0.06/+0.18	60	50
HPP8-5560-60	55	+0.06/+0.18	60	60
HPP8-6065-30	60	+0.06/+0.18	65	30
HPP8-6065-40	60	+0.06/+0.18	65	40
HPP8-6065-50	60	+0.06/+0.18	65	50
HPP8-6065-60	60	+0.06/+0.18	65	60
HPP8-6570-50	65	+0.06/+0.18	70	50
HPP8-7075-60	70	+0.06/+0.18	75	60
HPP8-7580-40	75	+0.06/+0.18	80	40
HPP8-115121-90	115	+0.072/+0.212	121	90
HPP8-120125-100	120	+0.072/+0.212	125	100

*d 公差为压入标准 H7 座孔 (ISO3547-1) 后公差

*Tolerance d: after being pressed into housing H7(ISO3547-1)

翻边轴套 Metric Flange Bushings



推荐安装公差 Recommend fitting tolerance:

座孔 Housing: H7

轴 Shaft: h9

订购编码 Order P/N:

HPP8 F-0304-03

翻边轴套 Flange bushes
 材料 Material

d	f
1-6	0.3
6-12	0.5
12-30	0.8
>30	1.2

订购编号 Order PN	d ₁ [mm]	d ₁ -公差 After fitting [mm]	d ₂ [mm]	d ₂ [d13] [mm]	L[h13] [mm]	t _{0.15} [mm]
HPP8F-0304-03	3	+0.014/+0.054	4.5	7.5	3	0.75
HPP8F-0304-05	3	+0.014/+0.054	4.5	7.5	5	0.75
HPP8F-0405-03	4	+0.02/+0.068	5.5	9.5	3	0.75
HPP8F-0405-04	4	+0.02/+0.068	5.5	9.5	4	0.75
HPP8F-0405-06	4	+0.02/+0.068	5.5	9.5	6	0.75
HPP8F-0506-3.5S	5	+0.01/+0.04	6	10	3.5	0.5
HPP8F-0506-05S	5	+0.01/+0.04	6	10	5	0.5
HPP8F-050614-06S	5	+0.01/+0.04	6	14	6	0.5
HPP8F-0507-03	5	+0.02/+0.068	7	11	3	1
HPP8F-0507-04	5	+0.02/+0.068	7	11	4	1
HPP8F-0507-05	5	+0.02/+0.068	7	11	5	1
HPP8F-0507-07	5	+0.02/+0.068	7	11	7	1
HPP8F-0607-10	6	+0.01/+0.04	7	11	10	0.5
HPP8F-0608-04	6	+0.02/+0.068	8	12	4	1
HPP8F-0608-05	6	+0.02/+0.068	8	12	5	1
HPP8F-0608-06	6	+0.02/+0.068	8	12	6	1
HPP8F-0608-07	6	+0.02/+0.068	8	12	7	1
HPP8F-0608-08	6	+0.02/+0.068	8	12	8	1
HPP8F-0608-10	6	+0.02/+0.068	8	12	10	1
HPP8F-0708-08S	7	+0.013/+0.049	8	12	8	0.5
HPP8F-0809-12	8	+0.013/+0.049	9	13	12	0.5
HPP8F-0810-04	8	+0.025/+0.083	10	15	4	1
HPP8F-0810-05	8	+0.025/+0.083	10	15	5	1
HPP8F-0810-07	8	+0.025/+0.083	10	15	7	1
HPP8F-0810-09	8	+0.025/+0.083	10	15	9	1
HPP8F-0810-10	8	+0.025/+0.083	10	15	10	1
HPP8F-0810-15	8	+0.025/+0.083	10	15	15	1
HPP8F-0810-30	8	+0.025/+0.083	10	15	30	1
HPP8F-1012-04	10	+0.025/+0.083	12	18	4	1
HPP8F-1012-05	10	+0.025/+0.083	12	18	5	1
HPP8F-1012-06	10	+0.025/+0.083	12	18	6	1
HPP8F-1012-07	10	+0.025/+0.083	12	18	7	1
HPP8F-1012-09	10	+0.025/+0.083	12	18	9	1
HPP8F-1012-10	10	+0.025/+0.083	12	18	10	1
HPP8F-1012-12	10	+0.025/+0.083	12	18	12	1
HPP8F-1012-15	10	+0.025/+0.083	12	18	15	1
HPP8F-1012-17	10	+0.025/+0.083	12	18	17	1
HPP8F-101216-06	10	+0.025/+0.083	12	16	6	1
HPP8F-101216-09	10	+0.025/+0.083	12	16	9	1
HPP8F-1213-12S	12	+0.016/+0.059	13	17	12	0.5
HPP8F-1214-06	12	+0.032/+0.102	14	20	6	1
HPP8F-1214-07	12	+0.032/+0.102	14	20	7	1
HPP8F-1214-09	12	+0.032/+0.102	14	20	9	1
HPP8F-1214-10	12	+0.032/+0.102	14	20	10	1
HPP8F-1214-11	12	+0.032/+0.102	14	20	11	1
HPP8F-1214-12	12	+0.032/+0.102	14	20	12	1
HPP8F-1214-15	12	+0.032/+0.102	14	20	15	1


订购编号 Order PN	d ₁ [mm]	d ₁ -公差 After fitting [mm]	d ₂ [mm]	d ₂ [d13] [mm]	L[h13] [mm]	t _{0.15} [mm]
HPP8F-1214-17	12	+0.032/+0.102	14	20	17	1
HPP8F-1214-20	12	+0.032/+0.102	14	20	20	1
HPP8F-1214-24	12	+0.032/+0.102	14	20	24	1
HPP8F-1416-03	14	+0.032/+0.102	16	22	3	1
HPP8F-1416-04	14	+0.032/+0.102	16	22	4	1
HPP8F-1416-06	14	+0.032/+0.102	16	22	6	1
HPP8F-1416-08	14	+0.032/+0.102	16	22	8	1
HPP8F-1416-12	14	+0.032/+0.102	16	22	12	1
HPP8F-1416-17	14	+0.032/+0.102	16	22	17	1
HPP8F-1416-21	14	+0.032/+0.102	16	22	21	1
HPP8F-1517-05	15	+0.032/+0.102	17	23	5	1
HPP8F-1517-09	15	+0.032/+0.102	17	23	9	1
HPP8F-1517-12	15	+0.032/+0.102	17	23	12	1
HPP8F-1517-17	15	+0.032/+0.102	17	23	17	1
HPP8F-1517-20	15	+0.032/+0.102	17	23	20	1
HPP8F-1618-09	16	+0.032/+0.102	18	24	9	1
HPP8F-1618-12	16	+0.032/+0.102	18	24	12	1
HPP8F-1618-17	16	+0.032/+0.102	18	24	17	1
HPP8F-1618-21	16	+0.032/+0.102	18	24	21	1
HPP8F-1719-09	17	+0.032/+0.102	19	25	9	1
HPP8F-1719-25	17	+0.032/+0.102	19	25	25	1
HPP8F-1820-04	18	+0.032/+0.102	20	26	4	1
HPP8F-1820-06	18	+0.032/+0.102	20	26	6	1
HPP8F-1820-11	18	+0.032/+0.102	20	26	11	1
HPP8F-1820-12	18	+0.032/+0.102	20	26	12	1
HPP8F-1820-17	18	+0.032/+0.102	20	26	17	1
HPP8F-1820-22	18	+0.032/+0.102	20	26	22	1
HPP8F-1820-30	18	+0.032/+0.102	20	26	30	1
HPP8F-2023-3.2	20	+0.04/+0.124	23	30	3.2	1.5
HPP8F-2023-07	20	+0.04/+0.124	23	30	7	1.5
HPP8F-2023-11.5	20	+0.04/+0.124	23	30	11.5	1.5
HPP8F-2023-16.5	20	+0.04/+0.124	23	30	16.5	1.5
HPP8F-2023-21.5	20	+0.04/+0.124	23	30	21.5	1.5
HPP8F-222535-09	22	+0.04/+0.124	25	35	9	1.5
HPP8F-2427-10	24	+0.04/+0.124	27	32	10	1.5
HPP8F-2528-11.5	25	+0.04/+0.124	28	35	11.5	1.5
HPP8F-2528-16.5	25	+0.04/+0.124	28	35	16.5	1.5
HPP8F-2528-21.5	25	+0.04/+0.124	28	35	21.5	1.5
HPP8F-2528-30	25	+0.04/+0.124	28	35	30	1.5
HPP8F-2830-36	28	+0.04/+0.124	30	35	36	2
HPP8F-3032-12	30	+0.04/+0.124	32	37	12	1
HPP8F-3034-16	30	+0.04/+0.124	34	42	16	2
HPP8F-3034-20	30	+0.04/+0.124	34	42	20	2
HPP8F-3034-26	30	+0.04/+0.124	34	42	26	2
HPP8F-3034-37	30	+0.04/+0.124	34	42	37	2
HPP8F-3034-45	30	+0.04/+0.124	34	42	45	2
HPP8F-3236-16	32	+0.05/+0.15	36	40	16	2

订购编码 Order PN	d ₁ [mm]	d ₁ - 公差 After fitting [mm]	d ₂ [mm]	d ₂ [d13] [mm]	L[h13] [mm]	t _{±0.12} [mm]
HPP8F-3236-26	32	+0.05/+0.15	36	40	26	2
HPP8F-3539-07	35	+0.05/+0.15	39	47	7	2
HPP8F-3539-12	35	+0.05/+0.15	39	47	12	2
HPP8F-3539-16	35	+0.05/+0.15	39	47	16	2
HPP8F-3539-26	35	+0.05/+0.15	39	47	26	2
HPP8F-3539-36	35	+0.05/+0.15	39	47	36	2
HPP8F-4044-14	40	+0.05/+0.15	44	52	14	2
HPP8F-4044-20	40	+0.05/+0.15	44	52	20	2
HPP8F-4044-30	40	+0.05/+0.15	44	52	30	2
HPP8F-4044-40	40	+0.05/+0.15	44	52	40	2
HPP8F-4044-50	40	+0.05/+0.15	44	52	50	2
HPP8F-4246-50	42	+0.05/+0.15	46	53	50	2
HPP8F-4550-30	45	+0.05/+0.15	50	58	30	2
HPP8F-4550-50	45	+0.05/+0.15	50	58	50	2

订购编码 Order PN	d ₁ [mm]	d ₁ - 公差 After fitting [mm]	d ₂ [mm]	d ₂ [d13] [mm]	L[h13] [mm]	t _{±0.12} [mm]
HPP8F-5055-10	50	+0.05/+0.15	55	63	10	2
HPP8F-5055-40	50	+0.05/+0.15	55	63	40	2
HPP8F-5055-50	50	+0.05/+0.15	55	63	50	2
HPP8F-6065-07	60	+0.06/+0.18	65	73	7	2
HPP8F-6065-22	60	+0.06/+0.18	65	73	22	2
HPP8F-6065-30	60	+0.06/+0.18	65	73	30	2
HPP8F-6065-50	60	+0.06/+0.18	65	73	50	2
HPP8F-6570-50	65	+0.06/+0.18	70	78	50	2
HPP8F-7075-50	70	+0.06/+0.18	75	83	50	2
HPP8F-9095-11	90	+0.072/+0.212	95	103	11	2.5
HPP8F-100105-11.5	100	+0.072/+0.212	105	113	11.5	2.5
HPP8F-100105-100	100	+0.072/+0.212	105	113	100	2.5

*d₁ 公差为压入标准 H7 座孔 (ISO3547-1) 后公差*Tolerance d₁: after being pressed into housing H7(ISO3547-1)

垫片 Metric Thrust Washers

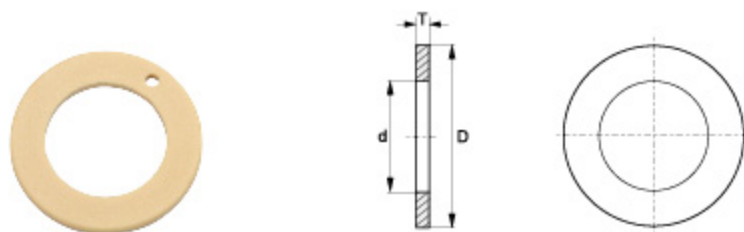

订购编码 Order PN:

HPP8 W-0509-006

HPP8 | W-0509-006
 | | | | |
 垫片 Washer
 材料 Material

订购编码 Order PN	d ^{+0.25} [mm]	D _{-0.25} [mm]	T _{-0.05} [mm]
HPP8W-0509-006	5	9	0.6
HPP8W-0615-015	6	15	1.5
HPP8W-0620-015	6	20	1.5
HPP8W-0815-005	8	15	0.5
HPP8W-0815-015	8	15	1.5
HPP8W-0818-010	8	18	1.0
HPP8W-0818-015	8	18	1.5
HPP8W-1018-010	10	18	1.0
HPP8W-1018-015	10	18	1.5
HPP8W-1018-020	10	18	2.0
HPP8W-1224-015	12	24	1.5
HPP8W-1426-015	14	26	1.5
HPP8W-1524-015	15	24	1.5
HPP8W-1630-015	16	30	1.5

订购编码 Order PN	d ^{+0.25} [mm]	D _{-0.25} [mm]	T _{-0.05} [mm]
HPP8W-1832-015	18	32	1.5
HPP8W-2036-015	20	36	1.5
HPP8W-2238-015	22	38	1.5
HPP8W-2442-015	24	42	1.5
HPP8W-2640-0075	26	40	0.75
HPP8W-2644-015	26	44	1.5
HPP8W-2848-015	28	48	1.5
HPP8W-3254-015	32	54	1.5
HPP8W-3862-015	38	62	1.5
HPP8W-4266-015	42	66	1.5
HPP8W-4874-020	48	74	2.0
HPP8W-5278-020	52	78	2.0
HPP8W-6290-020	62	90	2.0

* 根据要求提供定位孔设计 The fixing bore design upon request