


KGS-薄壁轴承 Thin-Wall Bearings

订购编码 Order PN

订购编码 Order PN:

KGS-04-04

高度 High
内径 Inner diameter

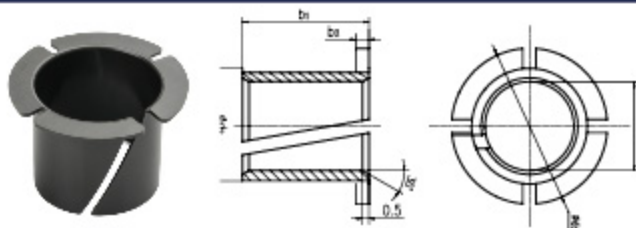


座孔 Housing: H7 轴 Shaft: h9

订购编码 Order PN	d_1 [mm]	公差 Tolerance [mm]	d_2 [mm]	$d_3 \pm 0.40$ [mm]	$b_{1[-0.40]}$ [mm]	$b_{2[-0.13]}$ [mm]
KGS-04-04	4	+0.025/+0.075	5.2	7.0	4	0.6
KGS-05-05	5	+0.025/+0.075	6.2	8.0	5	0.6
KGS-06-06	6	+0.025/+0.075	7.2	9.5	6	0.6
KGS-08-08	8	+0.025/+0.075	9.6	12.0	8	0.8
KGS-10-10	10	+0.025/+0.075	11.6	15.0	10	0.8
KGS-12-12	12	+0.025/+0.075	13.6	18.0	12	0.8
KGS-14-14	14	+0.025/+0.075	15.6	21.0	14	0.8
KGS-16-16	16	+0.025/+0.075	17.6	24.0	16	0.8
KGS-20-20	20	+0.025/+0.075	21.6	30.0	20	0.8
KGS-25-25	25	+0.025/+0.075	27.4	37.5	25	1.2

* d_1 公差为压入标准 H7 座孔 (ISO3547-1) 后公差 * Tolerance d_1 : after being pressed into housing H7 (ISO3547-1)

KGS薄壁塑料轴承安装方式 Thin-Wall Plastic Bearings Installation Method

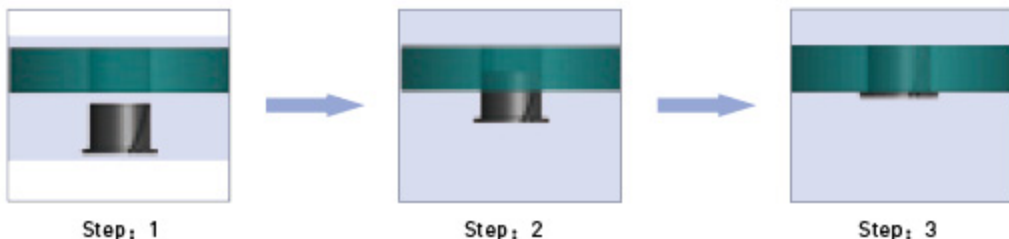

Step: 1

Step: 2

Step: 3

易用手装配 Easy assembly by hands