

## GB-03 法兰关节轴承

### GB-03 Flange Spherical Bearings

#### 产品特性 Product Features

- 球体采用高耐磨材料HPP28制成
  - 保持器采用抗压和尺寸稳定性材料M163制成
  - 干运行、免维护
  - 抵抗灰尘和污垢
  - 补偿中心误差
  - 耐腐蚀，可用于液体介质环境
  - 重量轻、易安装
- Sphencal ball made of highly wear-resistant HPP28
  - Housmg made of high strength and shape-stable M163
  - Maintenance-free dry operation
  - Compensation of misalignment errors
  - Absokda corrosion resistance
  - Vely low weight
  - Easy installation





#### 订购编码 Order PN

订购编码 Order PN:

GB-03-04

内径 Inner diameter

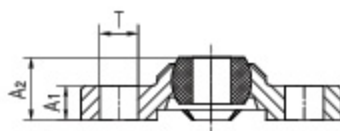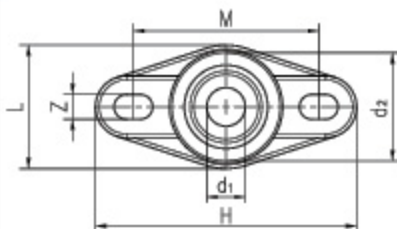

订购编码 Order PN	d <sub>1</sub> E10 [mm]	d <sub>2</sub> [mm]	A <sub>1</sub> [mm]	A <sub>2</sub> [mm]	T [mm]	L [mm]	H [mm]	Z [mm]	M [mm]	最大静载荷 Max. static load		最大径向静态 Max. axial static load		最大静态 转矩 - 孔 Max. tight- ening torque- Holes [Nm]	最大调 节角度 Max. ad- just angle	重量 Weight [g]
										短期 Sort- term [N]	长期 Long- term [N]	短期 Sort- term [N]	长期 Long- term [N]			
GB-03-04	4	14	4.5	8	5	16	33.8	3.2	24	400	200	750	375	0.6	29°	1.9
GB-03-05	5	14	4.5	8.5	5	16	33.8	3.2	24	400	200	750	375	0.6	29°	2.3
GB-03-06	6	14	4.5	8.5	5	16	33.8	3.2	24	500	250	800	400	0.6	25°	1.8
GB-03-08	8	18	5.5	10.5	6.5	22	44.2	4.3	31	700	350	1100	550	1.3	25°	4.1
GB-03-10	10	22	6.5	12	8	26	52	5.3	36	850	425	2000	1000	2.5	25°	6.8
GB-03-12	12	25	7	13	8	31	56.7	5.3	41	1100	550	2200	1100	2.5	21°	8.9
GB-03-15	15	29.8	8.5	15.5	10	36	68.6	6.4	50	1300	650	2400	1200	4.5	20°	15
GB-03-16	16	32	10	17.5	10.1	38	72.6	6.4	53	1400	700	2800	1400	4.5	27°	17.7
GB-03-20	20	40	11	20	12.5	47	89	8.4	65	1800	900	5500	2750	10.5	19°	32.8
GB-03-25	25	48.5	14	25	12.6	58.5	101	8.4	75	3000	1500	6000	3000	10.5	15°	58.5
GB-03-30	30	55	15	26	16	65	118	10.5	87.5	3500	1750	6500	3250	21.5	14°	78.9